

S10 Electrical Thermometer for RTD and Thermocouples

TYPICAL USES

- Choice of single or dual RTD or TC
- Sensor Types: Pt100, Pt1000, Type J, E, K or N
- Metric Stem Diameters: 3 mm, 4.5 mm, 6 mm and 8 mm
- Head Types: DIN B, BBK, BUZ and BUZH
- High accuracy sensors available
- Wide selection of aluminum alloy or 316 SS connection heads
- DIN Standard lag extension
- Available stainless steel tags with customer specified information

DESCRIPTION

- Power Generation
- Reactors
- Storage Tanks
- Cooling Towers
- Industrial equipment Manufacture
- Industrial Ovens
- HVAC/R
- Food and Beverage
- Pharmaceutical and Biotech



SPECIFICATIONS

Model:	S10																
Stem Diameter:	3 mm, 4.5 mm, 6 mm, 8 mm																
Stem Length:	min. 50 mm max. 3000 mm																
Stem Material:	Stainless steel 316L (1.4401) Inconel 600 (2.4816)																
Insulation Material:	Compacted pure MgO (Magnesium oxide)																
Lag Extension:	DIN-Style with Ø14/11 or Ø11/7																
Cable Entry:	Cable gland in Nickel-plated brass, plastic or stainless steel																
Sensore Types and max. Range: (single and dual)	<table border="0"> <tr> <td>RTD:</td> <td></td> </tr> <tr> <td>Pt100</td> <td>-200 up to 600 °C</td> </tr> <tr> <td>Pt1000</td> <td>-40 up to 600 °C</td> </tr> <tr> <td>Thermocouples:</td> <td></td> </tr> <tr> <td>Type J</td> <td>-40 up to 750 °C</td> </tr> <tr> <td>Type E</td> <td>-200 up to 800 °C</td> </tr> <tr> <td>Type K</td> <td>-200 up to 1000 °C</td> </tr> <tr> <td>Type N</td> <td>-200 up to 1000 °C</td> </tr> </table>	RTD:		Pt100	-200 up to 600 °C	Pt1000	-40 up to 600 °C	Thermocouples:		Type J	-40 up to 750 °C	Type E	-200 up to 800 °C	Type K	-200 up to 1000 °C	Type N	-200 up to 1000 °C
RTD:																	
Pt100	-200 up to 600 °C																
Pt1000	-40 up to 600 °C																
Thermocouples:																	
Type J	-40 up to 750 °C																
Type E	-200 up to 800 °C																
Type K	-200 up to 1000 °C																
Type N	-200 up to 1000 °C																
Wiring Configuration:	RTD (single or dual) as 2, 3 or 4 wire Thermocouple (single or dual) as 2 wire																
Electrical Connection:	Ceramic terminal block Spring loaded with 8 to 10 mm travel																
Insulation Resistance:	For RTD $\geq 100 \text{ M}\Omega$ with $U = 250 \text{ VDC}$ For TC $\geq 1 \text{ G}\Omega$ with $U = 500 \text{ VDC}$																
Sensitive Length of																	
RTD:	7 to 40 mm																
Thermocouple:	< 5mm																
Ambient Temperature:	-40 to 85 °C																



KEY BENEFITS

- Designed for DIN 43772 thermowells
- Manufactured acc. IEC 60751 or IEC 60584-2
- Available with and without transmitters

ACCURACY CLASSES

Accuracy Classes: (RTD - IEC 60751)	Class A:	$\pm(0,15 + 0,0020 * t)$
	Class B:	$\pm(0,30 + 0,0050 * t)$
	1/2 Class B:	$\pm(0,15 + 0,0025 * t)$
	1/3 Class B:	$\pm(0,10 + 0,0017 * t)$

Accuracy Classes: (TC - ANSI MC 96.1)	Standard	Special	
	Type J	$\pm 2,2 \text{ °C}$ or $\pm 0,0075 * t $	$\pm 1,1 \text{ °C}$ or $\pm 0,0040 * t $
	Type E	$\pm 1,7 \text{ °C}$ or $\pm 0,0050 * t $	$\pm 1,0 \text{ °C}$ or $\pm 0,0075 * t $
	Type K	$\pm 2,2 \text{ °C}$ or $\pm 0,0075 * t $	$\pm 1,1 \text{ °C}$ or $\pm 0,0040 * t $
	Type N	$\pm 2,2 \text{ °C}$ or $\pm 0,0040 * t $	$\pm 1,1 \text{ °C}$ or $\pm 0,0040 * t $

S10 Electrical Thermometer for RTD and Thermocouples

ACCURACY CLASSES

Accuracy Classes: (TC - IEC 60584-2)	Class 1	Class 2	Class 3
Type J	±1,5 °C or ±0,0040 * t	±2,5 °C or ±0,0075 * t	N/A
Type E	±1,5 °C or ±0,0040 * t	±2,5 °C or ±0,0075 * t	±2,5 °C or ±0,0150 * t
Type K	±1,5 °C or ±0,0040 * t	±2,5 °C or ±0,0075 * t	±2,5 °C or ±0,0040 * t
Type N	±1,5 °C or ±0,0040 * t	±2,5 °C or ±0,0040 * t	±2,5 °C or ±0,0150 * t

APPROVALS

Available Approvals: FM, ATEX, IECEx, SIL2, INMETRO, EAC, CCC, AMI, ExNEPSI

FM Intrinsically safe:
Class I, Division 1,
Groups A, B, C, D

T4 for -55 °C ≤ Ta ≤ +80 °C
T5 for -55 °C ≤ Ta ≤ +55 °C
T6 for -55 °C ≤ Ta ≤ +40 °C

FM Nonincendive:
Class I, Division 2,
Groups A, B, C, D


T4 for -55 °C ≤ Ta ≤ +80 °C
T5 for -55 °C ≤ Ta ≤ +55 °C
T6 for -55 °C ≤ Ta ≤ +40 °C

ATEX or IECEx:

II 1 G Ex ia IIC T6 Ga -50 °C to +60 °C
II 2 G Ex ib IIC T6 Gb -50 °C to +60 °C
II 2 G Ex e IIC T6 Gb -55 °C to +60 °C



SENSING ELEMENT TYPES



RTD



TC - ungrounded




TC - grounded


MINIMUM IMMERSION LENGTH

Type & Inserts Ø	in liquid	in gas/vapour
RTD Ø 3 mm	45 mm	55 mm
RTD Ø 6 mm	60 mm	75 mm
TC Ø 3 mm	15 mm	25 mm
TC Ø 6 mm	30 mm	50 mm


MEASUREMENT CIRCUITS - COLOR IDENTIFICATION FOR RTD

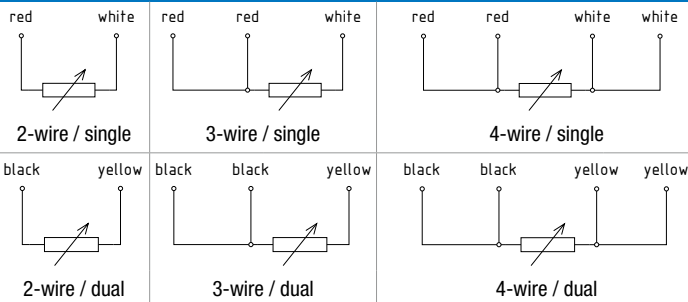


HEAD TYPES



DIN A - IP 54 or IP66
Aluminum alloy



DIN B - IP66
Aluminum alloy



Ex(d) - IP66
Aluminum alloy /
Stainless steel 316



**S10 Electrical Thermometer
for RTD and Thermocouples**

HEAD TYPE	MATERIAL	CABLE ENTRY	CABLE GLAND	IP RATING
DIN B	Aluminum epoxy coated	M20x1,5	without	IP 00
			Polyamide PA	IP66
			Nickel-plated brass	IP66
		PG16	Stainless steel	IP66
			without	IP 00
			Polyamide PA	IP66
BBK	Plastic	PG16	Nickel-plated brass	IP66
			without	IP 00
BUZ/BUZH	Aluminum epoxy coated	M20x1,5	Polyamide PA	IP66
			Nickel-plated brass	IP66
			Stainless steel	IP66
			without	IP 00
		PG16	Polyamide PA	IP66
			Nickel-plated brass	IP66
			without	IP 00
			Polyamide PA	IP66
		1/2 NPT	Nickel-plated brass	IP66
			without	IP 00
			Polyamide PA	IP66
			Stainless steel	IP66


LAG EXTENSION	CONNECTION TO HEAD	CONNECTION TO THERMOWELL	STANDARD LENGTH
DIN Ø11/7	M24x1,5	G 1/2	150 mm
		M14x1,5	
		M18x1,5	
DIN Ø14/11	M24x1,5	G 1/2	16 mm
		M18x1,5	
without	M24x1,5	G 1/2	16 mm
		G 3/4	
		M14x1,5	
		M18x1,5	27 mm
		1/2 NPT	
		Compression fitting G 1/2	
Compression fitting 1/2 NPT	0 mm		



S10 Electrical Thermometer for RTD and Thermocouples

DIMENSIONS IN MM [INCH]

For reference only, consult Ashcroft for specific dimensional drawings

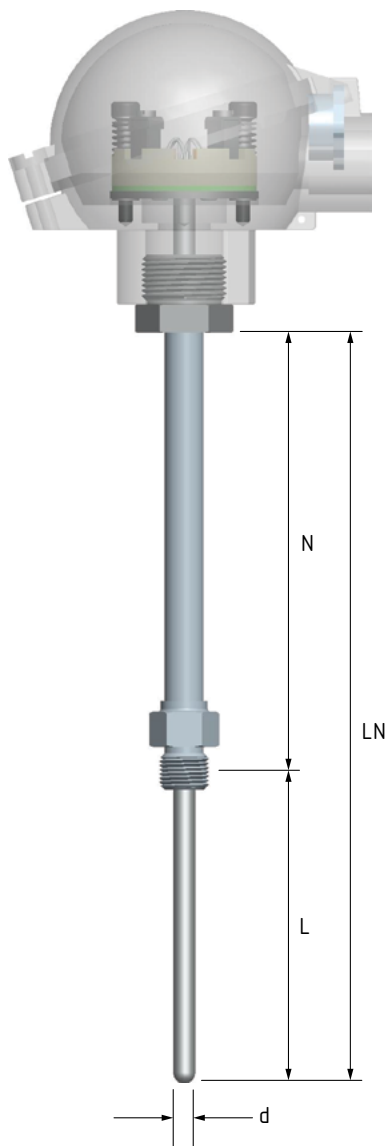

HOW TO ORDER S10 TEMPERATURE PROBES:

- The ordering code is built by selecting the appropriate configuration for the various sections of the ordering code.
- The Insert nominal length LN is measured from base of the head to the tip of the probe.
- The lag extension length N is measured from the base of the head to the center of the threads on the lag extension.
- LN can be calculated by adding the lag extension length N to the probe insertion length L.
- The N length and the LN length are added to the end of the ordering code in millimeters.

d = Stem diameter

N = Lag Extension Length

L = Insertion Length

LN = Insert Nominal Length

LN = N + L

